


Specification :-

1. Single Stage Double Regulator Carbon Dioxide Soda Fountain Regulator
2. Two Outlet Connections
3. Inlet Pressure :- (0-400 Bar)
4. Outlet / Working Pressure (1st Regulator) :- (0-10 Bar)
5. Outlet /Working Pressure (IInd Regulator) :- (0-5 Bar)
6. Safety Pressure :- (10 Bar)
7. Outlet Connection:- 3/8" - 19 BSP(RH)
8. Available with heater and without heater

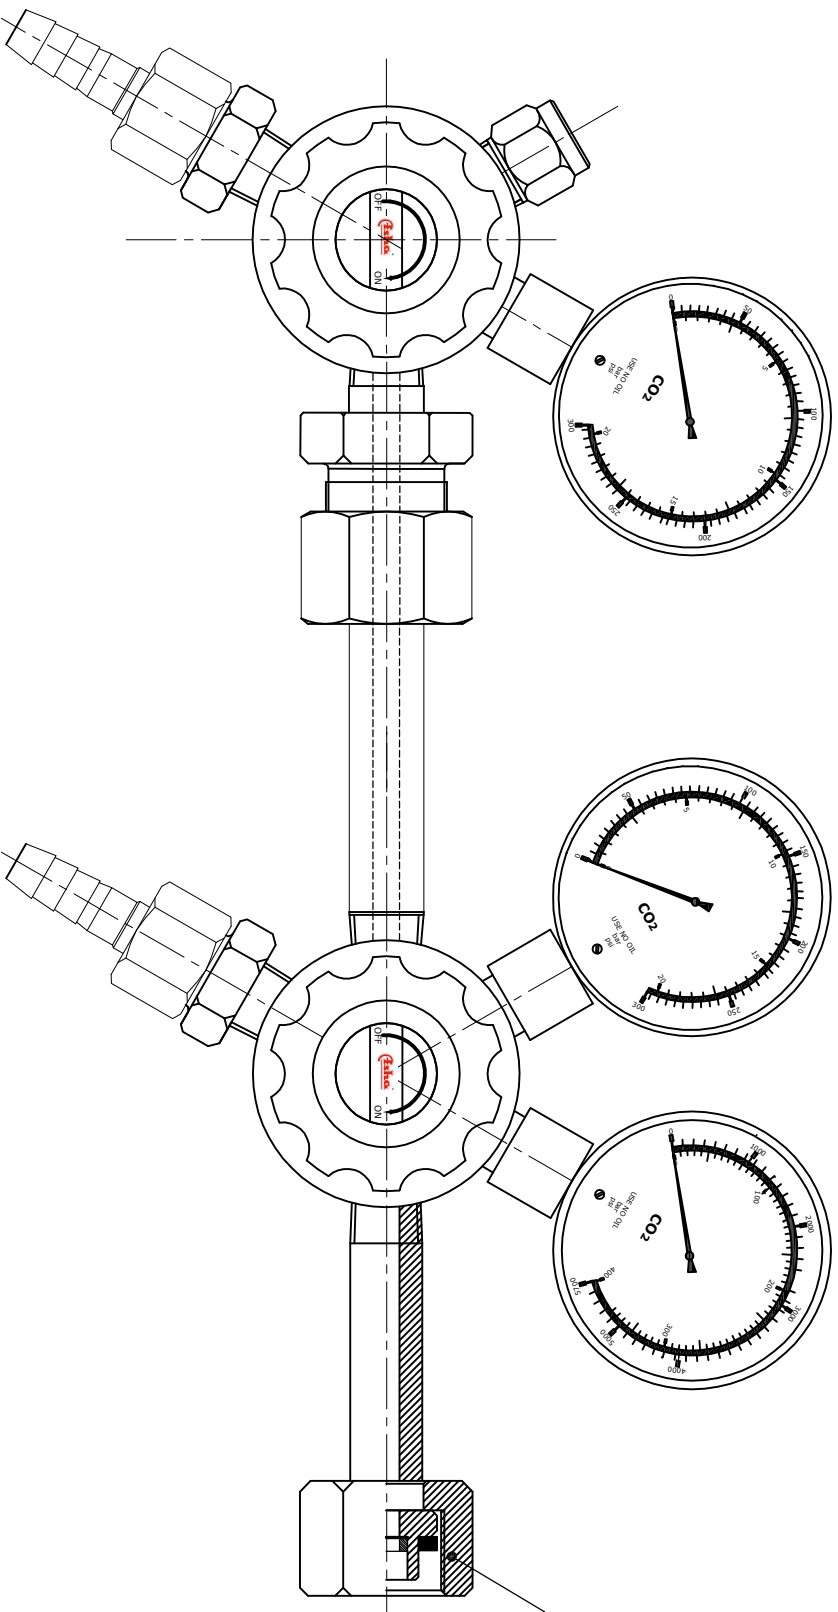

Inlet Connection (Carbon Dioxide)
W21.8 -1.814 (RH)